

**CONFORMITY TO TYPE BASED ON INTERNAL PRODUCTION CONTROL PLUS SUPERVISED
PRODUCT CHECKS AT RANDOM INTERVALS (MODULE C2)**

**MODÜL C2 - ÜRETİMİN DÂHİLÎ KONTROLÜ VE ÜRÜNÜN RASTGELE
ARALIKLARLA DENETİMLİ MUAYENESİNE DAYALI TİPE UYGUNLUK**

Belge No / Certificate No	: 157-21-01-R01-01
Belgelendirme Tarihi - Bir Sonraki Belge Tarihi / Certification Date / Certificate Validity Date	: 01.10.2021-01.10.2022
Belge Geçerlilik Tarihi / Document Validity Period:	1 yıl / 1 year
Firma Unvanı ve Adresi / Company Name and Address	: LDR İŞ GÜVENLİĞİ EKİPMANLARI VE MAKİNA SAN. LTD. ŞTİ. Akçaburgaz Mah.1585 Sk. No:2 Tem 34 1. Etap B2 Blok No: 40 Esenyurt/ İstanbul / TÜRKİYE
Ürün Adı /Modeller / Product Name / Models	: LDR 3002
Direktifi / Directive	: 2016/425 REGULATION
Modülü/Kategori / Module / Category	: C2 MODÜLÜ/ KATEGORİ III MODULE C2 / CATEGORY III
Teknik Değerlendirme Rapor No/ Technical Evaluation Report No	: MNA 157-21-01-R01-01
Ürün Tipi / Product Type:	
- EN 149:2001+ A1:2009 Solunumla ilgili koruyucu cihazlar - Parçacıklara karşı koruma amaçlı filtreli yarım maskeler/ Respiratory protective devices - Filtering half masks to protect against particles	

Ürünün Malzeme Bilgisi / Product Material Information: LDR 3002 model ürünleri kumaş, elastik kayış, burun klipsi, filtre katmanı kullanılarak imal edilmiştir./ LDR 3002 products are manufactured using fabric, elastic strap, nose clip, filter layer.


Volkan AKIN
01.10.2021

Karar Verici / Approver



Okan AKEL
01.10.2021

Şirket Müdürü / General manager

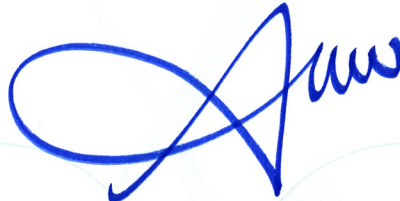



Report No : 157-21-01-R01-01

Report Date : 01.10.2021

Application No : 157-21-01-R01

1. COMPANY INFORMATION:

LDR İŞ GÜVENLİĞİ EKİPMANLARI VE MAKİNA SAN. LTD. ŞTİ.

Akçaburgaz Mah.1585 Sk. No:2 Tem 34 1. Etap B2 Blok No: 40 Esenyurt/ İstanbul / TÜRKİYE

Tel: +90 212 577 25 35

E-mail: info@ldrtozmaskesi.com


2. PPE INFORMATION:

Disposable and non-sterile half mask made of particulate protection filter material.

3. PPE TYPE IDENTIFICATION

EN 149:2001+A1:2009 Respiratory protective devices – Filtering half masks to protect against particles - Requirements, testing, marking

4. PPE PICTURES

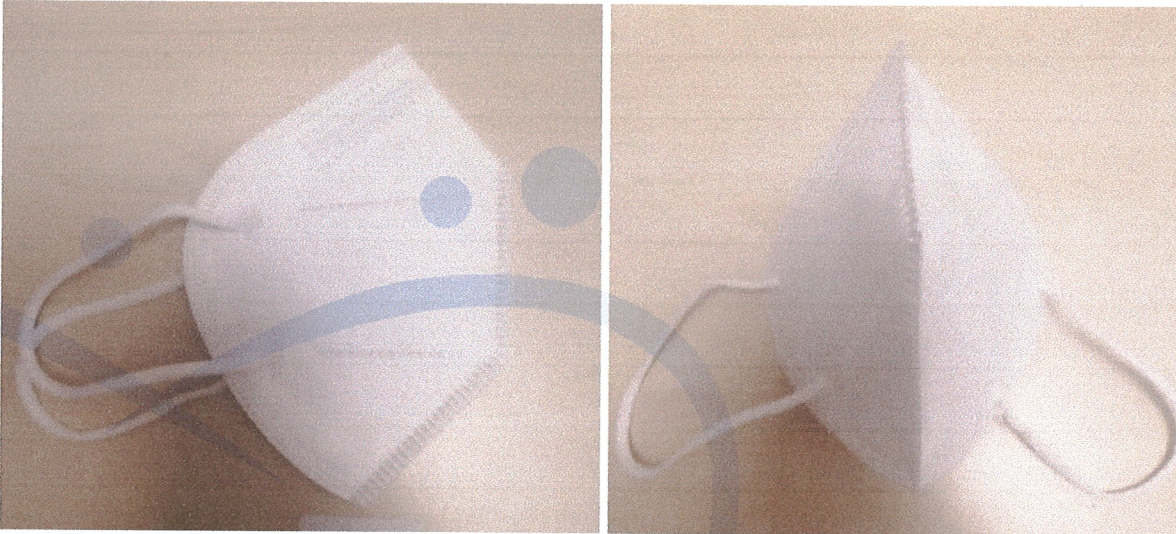

LDR 3002

5. PPE DIMENSIONS:

LDR 3002 model has been found to be produced using standard sizes.

6. PPE PRODUCT MATERIAL INFORMATION:

The mask is made of elastic strap, nonwoven fabric on the outer and inner layers and filter material on the middle layer.

7. ESSENTIAL HEALTH AND SAFETY REQUIREMENTS

- A visual inspection was made according to EN 149:2001 +A1:2009 for ergonomics.
- Protection levels and degrees are defined by the manufacturer.
- Suitable construction materials were determined by visual inspection according to EN 149:2001 +A1:2009.

8. ANALYSIS AND EVALUATIONS:

EN 149:2001 +A1:2009

TESTS	PARAMETER	PERFORMANCE LEVELS			RESULTS	PERFORMANCE LEVELS	EVALUATION
		FFP1	FFP2	FFP3			
Banned Azo Dyes	< 30 mg/kg				< 5 mg/kg	-	PASS
Part 7.3 Visual inspection	Shall also the marking and the information supplied by the manufacturer				Appropriate	-	PASS
Part 7.4 Packaging	Particle filtering half mask shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.				Appropriate	-	PASS
Part 7.5 Material	When conditioned in accordance 8.3.1 & 8.3.2 the particle filter half mask shall not collapse.				Appropriate	-	PASS
Part 7.6 Cleaning and disinfecting	After cleaning and disinfecting the re-usable particle filtering half mask shall satisfy the penetration requirement of the relevant class.				Not applicable	-	Not applicable
Part 7.7 Practical performance	No negative comments should be made by the test subject regarding any of the criteria evaluated.				Appropriate	-	PASS
Part 7.8 Finish of parts	Parts of the device likely to come into contact with the wearer shall have no sharp edge or burrs.				Appropriate	-	PASS
TESTS	PARAMETER	PERFORMANCE LEVELS			RESULTS	PERFORMANCE LEVELS	EVALUATION
		FFP1	FFP2	FFP3			
Part 7.9.1 Total inward leakage	At least 46 out of the 50 individual exercise result	<25	<11	<5	See the table below	FFP2	PASS
	At least 8 out of the 10 individual wearer arithmetic means	<22	<8	<2	See the table below	FFP2	PASS

Total Inward Leakage (%)						
	Exercise 1	Exercise 2	Exercise 3	Exercise 4	Exercise 5	Average
Subject 1 (As received)	7,6	6,6	5,8	7,8	6,1	6,8
Subject 2 (As received)	7,3	5,6	5,4	6,1	6,0	6,1
Subject 3 (As received)	5,6	5,8	5,8	5,7	5,5	5,7
Subject 4 (As received)	5,5	5,5	5,6	5,1	5,2	5,4
Subject 5 (As received)	6,7	7,9	7,3	5,0	6,8	6,7
Subject 6 (After temperature conditioning)	5,2	5,2	5,4	5,2	5,3	5,3
Subject 7 (After temperature conditioning)	7,0	7,2	6,9	5,9	6,8	6,8

(MODULE C2, ANNEX VII) (157-21-01-R01-01)

Part 7.11 Flammibility	Mask shall not burn or not to continue to burn for more than 5 s	Flame not seen	-	PASS
Part 7.12 Carbondioxide content of the inhalation air	Shall not exceed an average of % 1	0,77 0,78 0,81	-	PASS
Part 7.13 Head harness	It can be donned and removed easily	Appropriate	-	PASS
Part 7.14 Field of vision	The field of vision shall acceptable in practical performance test.	Appropriate	-	PASS
Part 7.15 Exhalation valve(s)	It shall withstand axially a tensile force of 10 N apply for 10 s. If fitted, shall continue to operate correctly after a continuous exhalation flow of 300 L/min over a period of 30 s.	Not applicable	-	Not applicable

TESTS	PARAMETER	PERFORMANCE LEVELS			RESULTS	PERFORMANCE LEVELS	EVALUATION
		FFP1	FFP2	FFP3			
Part 7.16 Breathing Resistance	Inhalation 30L/min	0,6 mbar	0,7 mbar	1,0 mbar	See the table below	FFP2	PASS
	Inhalation 95L/min	2,1 mbar	2,4 mbar	3,0 mbar	See the table below	FFP2	PASS
	Exhalation 160L/min	3,0 mbar	3,0 mbar	3,0 mbar	See the table below	FFP2	PASS

Breathing Resistance (mbar)	Inhalation 30L/min	Inhalation 95L/min
As received	0,4	1,1
As received	0,4	1,1
As received	0,4	1,1
After temperature conditioning	0,5	1,2
After temperature conditioning	0,5	1,2
After temperature conditioning	0,4	1,1
After the simulated wearing treatment	0,4	1,1
After the simulated wearing treatment	0,5	1,2
After the simulated wearing treatment	0,5	1,2
After flow conditioning	-	-
After flow conditioning	-	-
After flow conditioning	-	-

Breathing Resistance 160L/min (mbar)	Facing directly ahead	Facing vertically upwards	Facing vertically downwards	Lying on the left side	Lying on the right side
As received	1,7	1,7	1,8	1,8	1,7
As received	1,8	1,7	1,8	1,7	1,7
As received	1,8	1,7	1,7	1,8	1,8
After temperature conditioning	1,8	1,7	1,7	1,7	1,8
After temperature conditioning	1,7	1,8	1,8	1,7	1,7
After temperature conditioning	1,7	1,8	1,7	1,7	1,7

(MODULE C2, ANNEX VII) (157-21-01-R01-01)

Subject 8 (After temperature conditioning)	6,1	6,7	6,2	6,0	6,5	6,3
Subject 9 (After temperature conditioning)	5,5	5,5	5,6	5,4	5,2	5,4
Subject 10 (After temperature conditioning)	5,9	5,3	5,6	5,0	5,8	5,5

Subject facial dimensions

Subject	Face Length (mm)	Face Width (mm)	Face Depth (mm)	Mouth Width (mm)
1	133	132	132	65
2	125	144	116	67
3	126	135	124	75
4	123	133	134	74
5	117	135	122	73
6	122	142	133	66
7	113	132	114	75
8	135	123	123	65
9	122	135	133	74
10	135	142	125	83

TESTS	PARAMETER	PERFORMANCE LEVELS			RESULTS	PERFORMANCE LEVELS	EVALUATION
		FFP1	FFP2	FFP3			
Part 7.9.2 Penetration of filter material	Sodium chloride, 95 L/min %, max	% 20	% 6	% 1	See the table below	FFP2	PASS
	Paraffin oil, 95 L/min %, max	% 20	% 6	% 1	See the table below	FFP2	PASS

Penetration of filter material	Sodium Chloride (%)	Paraffin Oil (%)
As received	2,5	2,6
As received	2,4	3,2
As received	2,6	3,0
After the simulated wearing treatment	2,7	3,5
After the simulated wearing treatment	2,4	3,0
After the simulated wearing treatment	2,5	3,3
Mechanical strength and temperature conditioning	3,8	3,9
Mechanical strength and temperature conditioning	3,3	3,9
Mechanical strength and temperature conditioning	3,6	3,6

TESTS	PARAMETER	PERFORMANCE LEVELS			RESULTS	PERFORMANCE LEVELS	EVALUATION
		FFP1	FFP2	FFP3			
Part 7.10 Compatibility with skin	Materials shall not be known to be likely to cause irritation or any other adverse effect to health				Appropriate	-	PASS

**CONFORMITY TO TYPE BASED ON INTERNAL
PRODUCTION CONTROL PLUS SUPERVISED PRODUCT
CHECK AT RANDOM INTERVALS
(MODULE C2, ANNEX VII) (157-21-01-R01-01)**

After the simulated wearing treatment	1,7	1,7	1,7	1,8	1,7
After the simulated wearing treatment	1,7	1,8	1,7	1,8	1,8
After the simulated wearing treatment	1,7	1,8	1,7	1,8	1,7
After flow conditioning	-	-	-	-	-
After flow conditioning	-	-	-	-	-
After flow conditioning	-	-	-	-	-

TESTS	PARAMETER	PERFORMANCE LEVELS			RESULTS	PERFORMANCE LEVELS	EVALUATION
		FFP1	FFP2	FFP3			
Part 7.17 Clogging	After clogging the inhalation resistances shall not exceed. (valved)	4 mbar	5 mbar	7 mbar	Not applicable	-	Not applicable
	The exhalation resistance shall not exceed 3 mbar at 160 L/ min continuous flow. (valved)				Not applicable	-	Not applicable
	After clogging the inhalation and exhalation resistances shall not exceed. (valveless)	3 mbar	4 mbar	5 mbar	Not applicable	-	Not applicable
Part 7.18 Demountable part	All demountable parts (if fitted) shall be readily connected and secured were possible by hand.				Not applicable	-	Not applicable

9. DECISION

Analysis and examinations LDR 3002 model coded personal protective equipment; Respiratory Protective Devices EN 149:2001 +A1:2009- Filtered Half Masks for Protection Against Particles - Properties, Experiments and Marking standards are evaluated. The homogeneity of the production was monitored at the performance levels determined as a result of the technical evaluations made within the scope of MODULE C2.

10. ATTACHMENTS

- Basic Health Safety Requirements
- Risk Assessment
- Test Reports (M-2021-01362)
- User Instruction

CONTROLLER : VOLKAN AKIN

SIGNATURE :

DATE : 01.10.2021

